

WARP PREPARATION
准备设备

GAM



GAM air-controlled unwinding creel


GAM气控式退绕纱架

Your benefit

- Easy handling
- Automatic compensation of the yarn tension by magnetic system
- Rapid-stop system
- Air-damping system
- Absolutely wear-free thanks to eddy current brake
- Central adjustment

您的优势

- 操作简单
- 通过磁吸系统自动补偿纱线张力
- 快速制动系统
- 空气阻尼系统
- 涡流制动确保部件无磨损
- 中央调节

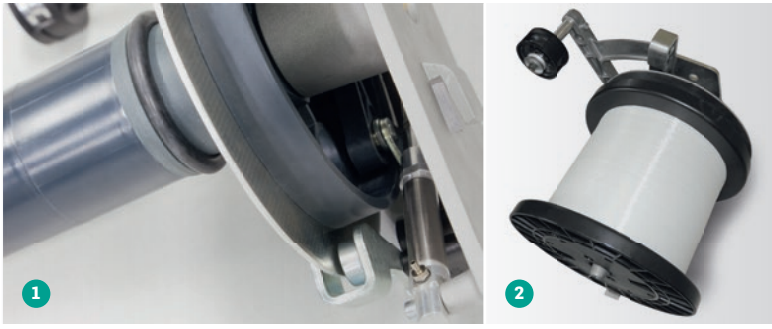

- 1 Control system
控制系统
- 2 Monofil bobbin
单丝纱筒

Product features

产品特点

- Air-controlled unwinding creel for monofilaments
- Ensures a twist-free yarn draw-off
- 用于单丝的气控式退绕纱架
- 确保退绕的时候不产生捻度

Options

选配

- Yarn break detector
- Second magnetic system for yarn tensions up to 1,200 cN
- 纱线断头检测器
- 第二套磁吸系统控制纱线张力, 可高达1200cN

Technical facts

技术参数

Application 应用	for monofil and wires 用于单丝和金属丝
Clamping range 夹持范围	22 mm diameter 直径22mm
Yarn tension 纱线张力	150 cN to 350 cN, optionally up to 1,200 cN 150 cN到350 cN, 选配高达1200 cN
Yarn count 纱线支数	monofil 0.2 to 1.5 mm, wires 0.1 to 0.8 mm 单丝0.2到1.5 mm, 金属丝0.1到0.8 mm
Speed 速度	50 to 300 m/min 50到300米/分
Eyelets 导纱瓷眼	made from aluminium oxide 由氧化铝制成